MAXI-PLOUGH Foldable 8800-VF

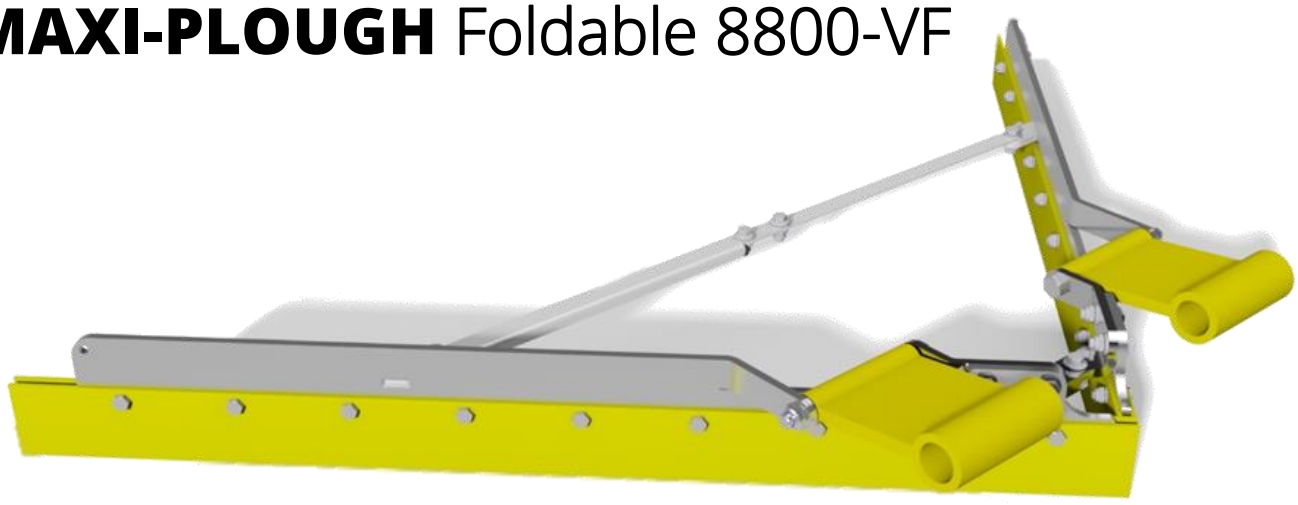

MAXI-PLOUGH FOLDABLE

-a foldable plough that is easy to fit.

The product is sturdy and reliable for heavy applications. It is foldable which makes it easier to handle before it is installed in the conveyor. Shipping costs are also lower when folded, making it an economical alternative.

The plough prevents material on the
returning belt from entering between the return pulley and the belt. This reduces the risk of damage, i.e. holes developing in the conveyor belt, and wandering belts or mistracking.

The plough is assembled with a pipe, ø40mm, fixed in the conveyor frame. To facilitate the assembly, Vendig can provide a pipe and a bracket separately as add-on items.

The scraper strips of polyurethane are easily replaced.

Bracket 8891 and pipe 8890, accessories for assembling of the plough.

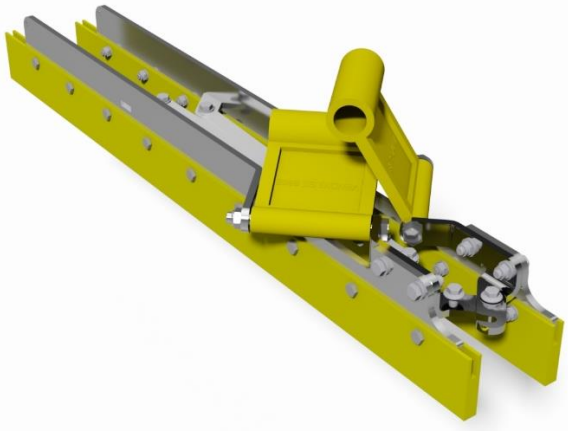

MAXI- Plough VF in folded position.

MAXI-Plough 8800-VF

1. 8889 M16 x 200mm, 2pcs
2. 2860 Hinge right
3. 2861 Hinge left
4. 8888 PU-link, 2 pcs
5. Plough frame
6. Plough PU-strip, see table
7. 2862/ 2863 Distance B-W 1200-1800/ Distance B-W 2000-2600.

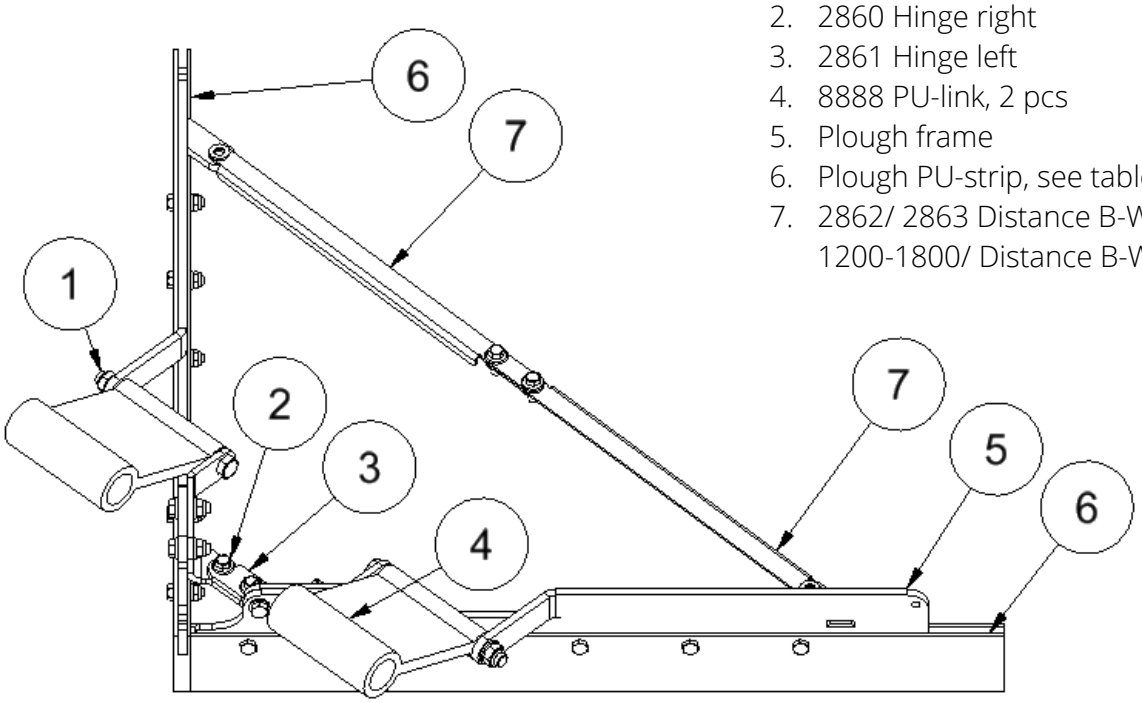

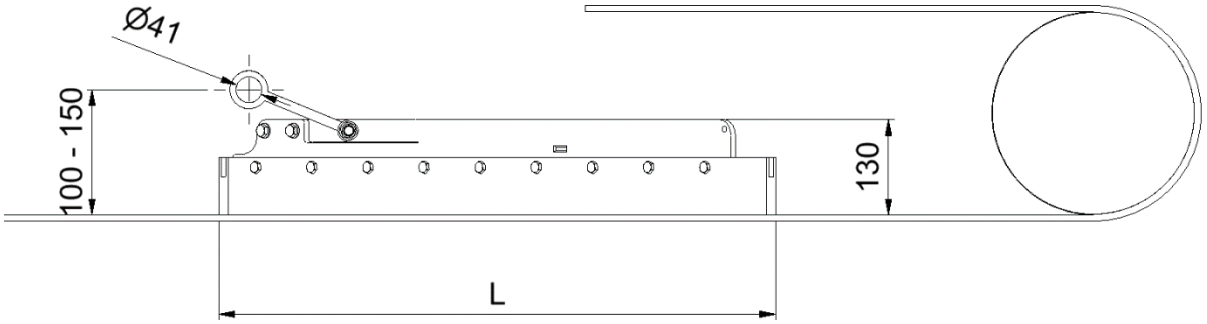

All steel parts are powdercoated as standrard.

ART NO.	B-W	WIDTH	L	ART NR PLOUG FRAME	ART NO PU-STRIP
2812	1200	1330	675	2872 R/L	8832
2814	1400	1530	775	2874 R/L	8834
2816	1600	1725	875	2876 R/L	8836
2818	1800	1920	975	2878 R/L	8838
2820	2000	2120	1075	2880 R/L	8840
2822	2200	2320	1170	2882 R/L	8843
2824	2400	2520	1270	2884 R/L	8844
2826	2600	2715	1370	2886 R/L	8846